
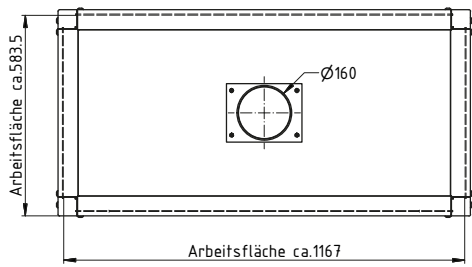
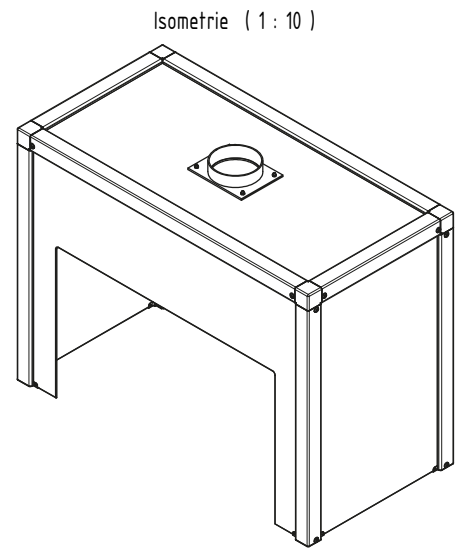
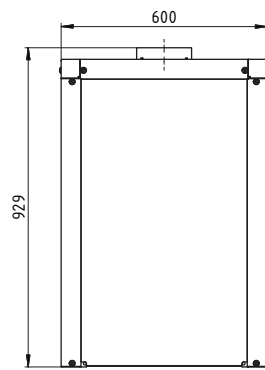


Function / construction:

- Ventilation testing of the air equipment in accordance with EN 14175-3 (5.4.4)
- The prescribed specified workplace limit values are maintained
- Ideal for assembly on an existing workplace
- Robust construction made of chemically resistant, anodised aluminium profiles
- Fracture-resistant acrylic glass, 5 mm
- Mounting on an on-site air exhaust system
- Connecting pieces (DN 160) in the ceiling for connection to the on-site exhaust air system
- The air speed should be 0,3 m/s

Technical data			
External dimensions (mm)		Weight (kg)	
Height (external)	900	Weight	30.4 kg
Width (external)	1200		
Depth (external)	600	Further information	
Internal dimensions (mm)		Amount of air ducts	1 piece
Height front opening	542	Nominal volume flow	540 m ³ /h
Width front opening	900	Differential pressure per air duct	208 Pa

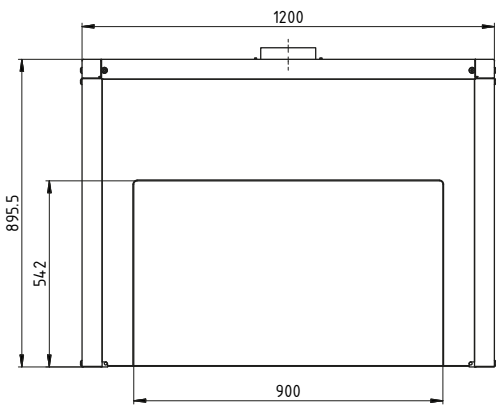

		Allgemein- toleranzen DIN 2768-m		Maßstab: 1 : 10	Gewicht: 31,21 kg
				Halbzeug:	Material:
8		Datum	Name	ASE.090.120.060 Absageinheit	
7		Bearb. 06.08.08	D.Taube		
6		Gepr.			
5		Norm			
4				 Ansichtszeichnung	
3					
2					
1				Blatt	
Zust.	Änderung	Datum	Name	Bl.	