


**Dimensions**

<b>Width (external)</b>	1402.00 mm
<b>Depth (internal)</b>	380.00 mm
<b>Height (external)</b>	601.00 mm
<b>Width (internal)</b>	770.00 mm
<b>Depth (external)</b>	502.00 mm
<b>Height (internal)</b>	502.00 mm

The available internal dimensions can vary depending on the interior equipment package.

**Weight / Load**

<b>Weight without interior equipment</b>	197 kg
<b>Distributed load</b>	236.00 kg/m <sup>2</sup>
<b>Maximum load</b>	300 kg

**Ventilation**

<b>Extraction air</b>	50 DN
<b>minimum exhaust air quantity 10 times</b>	3 m <sup>3</sup> /h
<b>Pressure drop inside the cabinet</b>	1 Pa

**Colouring / Surface finish**

<b>Body colour code</b>	RAL 7035
<b>Body colour</b>	Light grey
<b>Body surface finish</b>	plain
<b>Door / Drawer colour code</b>	RAL 7035
<b>Door / Drawer colour</b>	Light grey
<b>Door / Drawer surface finish</b>	plain

**General Information**

<b>Left compartment</b>	Compartment for the storage of flammable liquids
<b>Right compartment</b>	Compartment for the storage of aggressive, non flammable hazardous materials
<b>Depth with open doors</b>	964 mm
<b>Customs tariff number</b>	94032080

**Combi safety storage cabinet K-UB-90**

Model K90.060.140.050.UB.3T, light grey (RAL 7035)




**Safe and approved storage of aggressive and flammable hazardous substances in working areas**

**Function / construction:**

- **Robust construction and longevity:** body made of powder-coated sheet steel
- **User-friendly:** access to all containers, 93° opening of the wing door, interior of the cabinet completely visible
- **No unauthorised use:** doors lockable with cylinder lock and locking state indicator (red/green)
- **Mobile:** castors with plinth (optionally available), easy moving of the cabinet
- **Ventilation:** integrated air ducts ready for connection (DN 50) to a technical exhaust system, extraction of both compartments through one ventilation connection

Front view

Side view

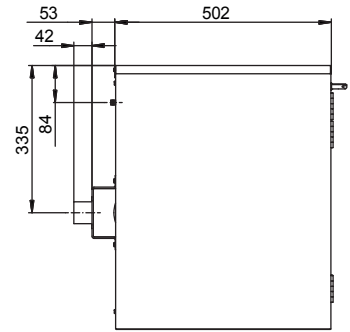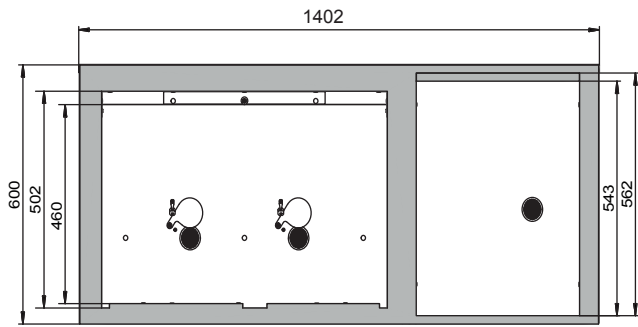

Top view

