asecos

ID-Nr. 30002-049

Model Q90.195.120.WDAC



Dimensions	
Width (external)	1193 mm
Depth (external)	615 mm
Height (external)	1953 mm
Width (internal)	1050 mm
Depth (internal)	522 mm
Height (internal)	1647 mm
The available internal dimensions can vary depending on the in	nterior equipment package.
Weight / Load	
Weight without interior equipment	424 kg
Distributed load	531 kg/m²
Maximum load	600 kg
Ventilation	
Extraction air	75 DN
minimum exhaust air quantity 10 times	9 m³/h
Pressure drop inside the cabinet	5 Pa
Colouring / Surface finish	
Body colour code	RAL 7016

Body colour code	RAL 7016
Body colour	anthracite grey
Body surface finish	textured
Door / Drawer colour	asecos silver
Door / Drawer surface finish	textured
General Information	
Number of doors	2
Number of doors Door opening angle	2 89.50°
Door opening angle	89.50°
Door opening angle Depth with open doors	89.50° 1165 mm
Door opening angle Depth with open doors Interiour grid dimension	89.50° 1165 mm 32 mm
Door opening angle Depth with open doors Interiour grid dimension Entry width transport base	89.50° 1165 mm 32 mm 1120 mm







Safety storage cabinet Q-PEGASUS-90 Model Q90.195.120.WDAC, body colour anthracite grey (RAL 7016), with wing doors in asecos silver


Safe and approved storage of flammable hazardous substances in working areas

Function / construction:

- Robust construction and longevity: triple hinged door, safety elements assembled outside the storage compartment for increased protection against corrosion, scratch- and impact-resistant surface, easy to clean
- Effortless use: one-hand operation for double-door cabinets (AGT)
- User-friendly and safe: door open arrest system (standard), convenient and safe removal or storage of containers
- Always closed: serial automatic door closing (TSA) releases arrested doors after approx. 60 seconds; acoustic and visual signal before closing
- No unauthorised use: doors lockable with cylinder locking (integration in an existing locking system possible) and locking state indicator (red/green)
- Easy transport: integrated transport base with removable, optional base cover
- Easy alignment: adjusting aids to compensate for uneven floor
- **Ventilation:** integrated air ducts ready for connection (DN 75) to a technical exhaust system, spinning wheel in the exhaust grid as an indicator of sufficient technical ventilation

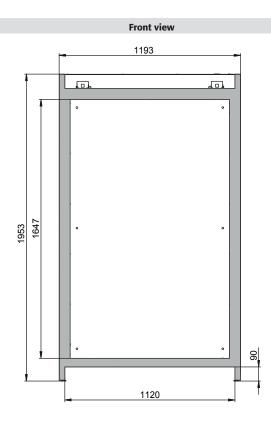





For further information please visit www.asecos.com

