## asecos

## ID-Nr. 30042-041

## Model Q90.195.090.WDAC



Dimensions		
Width (external)	893 mm	
Depth (external)	615 mm	
Height (external)	1953 mm	
Width (internal)	750 mm	
Depth (internal)	522 mm	
Height (internal)	1647 mm	
The available internal dimensions can vary depending on the interior equipment package.		
Weight / Load		
Weight without interior equipment	343 kg	
Distributed load	654 kg/m²	
Maximum load	600 kg	
Ventilation		
Extraction air	75 DN	
minimum exhaust air quantity 10 times	6 m³/h	
Pressure drop inside the cabinet	5 Pa	
Colouring / Surface finish		
Body colour code	RAL 7016	
Body colour	anthracite grey	
Body surface finish	textured	
Door / Drawer colour code	RAL 7035	
Door / Drawer colour	Light grey	
Door / Drawer surface finish	textured	
General Information		
Number of doors	2	

Number of doors	2
Door opening angle	89.50°
Depth with open doors	1015 mm
Interiour grid dimension	32 mm
Entry width transport base	820 mm
Entry height transport base	90 mm
Customs tariff number	94032080







Safety storage cabinet Q-PEGASUS-90 Model Q90.195.090.WDAC, body colour anthracite grey (RAL 7016), with wing doors in light grey (RAL 7035)


Safe and approved storage of flammable hazardous substances in working areas

## **Function / construction:**

- Robust construction and longevity: triple hinged door, safety elements assembled outside the storage compartment for increased protection against corrosion, scratch- and impact-resistant surface, easy to clean
- Effortless use: one-hand operation for double-door cabinets (AGT)
- User-friendly and safe: door open arrest system (standard), convenient and safe removal or storage of containers
- Always closed: serial automatic door closing (TSA) releases arrested doors after approx. 60 seconds; acoustic and visual signal before closing
- No unauthorised use: doors lockable with cylinder locking (integration in an existing locking system possible) and locking state indicator (red/green)
- **Easy transport:** integrated transport base with removable, optional base cover
- Easy alignment: adjusting aids to compensate for uneven floor
- **Ventilation:** integrated air ducts ready for connection (DN 75) to a technical exhaust system, spinning wheel in the exhaust grid as an indicator of sufficient technical ventilation

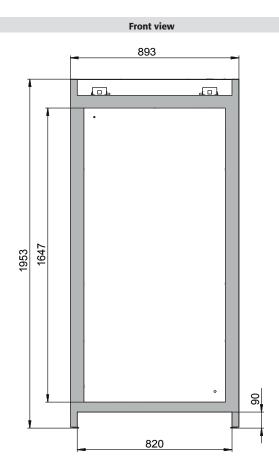

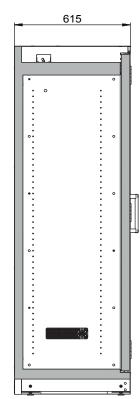



For further information please visit www.asecos.com

