



Safety storage cabinet S-PHOENIX touchless-90
Model S90.196.060.075.FDAO, warning yellow (RAL 1004)

Safe and approved storage of flammable hazardous substances in working areas

Function / construction:

- **Robust construction and longevity:** triple hinged door, body made of powder-coated sheet steel, safety elements assembled outside the cabinet for increased protection against corrosion
- **Space saving folding door:** less required space in front of the cabinet while door is open
- **Effortless use:** the sensor detects a person within approx. 2 seconds
- **User-friendly and safe:** after detection, the folding door opens automatically within approx. 5 seconds. The sensor recognises the person while operating and holds the folding door open
- **Always closed:** if the person leaves the sensor-controlled detection area, the folding door closes automatically after approx. 30 seconds
- **No unauthorised use:** door lockable with profile cylinder (integration in an existing locking system possible)
- **Easy alignment:** adjusting aids to compensate for uneven floor
- **Ventilation:** integrated air ducts ready for connection (DN 75) to a technical exhaust system

Dimensions	
Width (external)	596.00 mm
Depth (external)	749.00 mm
Height (external)	1968.00 mm
Width (internal)	450.00 mm
Depth (internal)	657.00 mm
Height (internal)	1742.00 mm

The available internal dimensions can vary depending on the interior equipment package.


Weight / Load	
Weight without interior equipment	310 kg
Distributed load	873.00 kg/m ²
Maximum load	600 kg

Ventilation	
Extraction air	75 DN
Pressure drop inside the cabinet	5 Pa
minimum exhaust air quantity 10 times	5 m ³ /h
Frequency	50 Hz
Power consumption in operation	0,35 W
Nominal voltage	230 V


Colouring / Surface finish	
Body colour code	RAL 1004
Body colour	Warning yellow
Body surface finish	plain
Door / Drawer colour code	RAL 1004
Door / Drawer colour	Warning yellow
Door / Drawer surface finish	plain

General Information	
Number of doors	1
Door opening angle	93.00°
Interiour grid dimension	32 mm
Depth with open doors	1064 mm
Customs tariff number	94032080

Front view

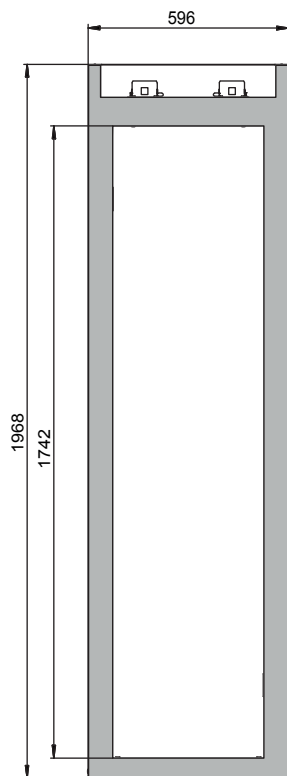

Side view

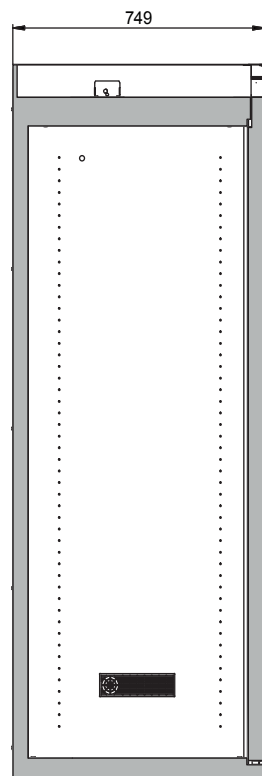

Top view

