



Safety storage cabinet XL-CLASSIC-90
Model XL90.222.155.WDAS, light grey (RAL 7035)

Safe and approved storage of flammable hazardous substances in working areas

Function / construction:

- **User-friendly and safe:** door open arrest system (standard), convenient and safe removal or storage of containers
- **No unauthorised use:** doors lockable with cylinder lock
- **Internal flexibility:** transport base (optional) for safe and easy in-house transport
- **Ventilation:** integrated air ducts ready for connection (DN 75) to a technical exhaust system
- **Safety while decanting:** end-to-end earthing link at the rear panel, inside with earthing wires incl. clamp

Dimensions

Width (external)	1555 mm
Depth (external)	1018 mm
Height (external)	2224 mm
Width (internal)	1386 mm
Depth (internal)	864 mm
Height (internal)	1890 mm

The available internal dimensions can vary depending on the interior equipment package.

Weight / Load

Weight without interior equipment	1150 kg
Distributed load	685 kg/m ²
Maximum load	1000 kg

Ventilation

Extraction air	75 DN
minimum exhaust air quantity 10 times	24 m ³ /h
Pressure drop inside the cabinet	15 Pa


Colouring / Surface finish

Body colour code	RAL 7035
Body colour	Light grey
Body surface finish	plain
Door / Drawer colour code	RAL 7035
Door / Drawer colour	Light grey
Door / Drawer surface finish	plain


General Information

Number of doors	2
Depth with open doors	1756 mm
Customs tariff number	94032080

Front view

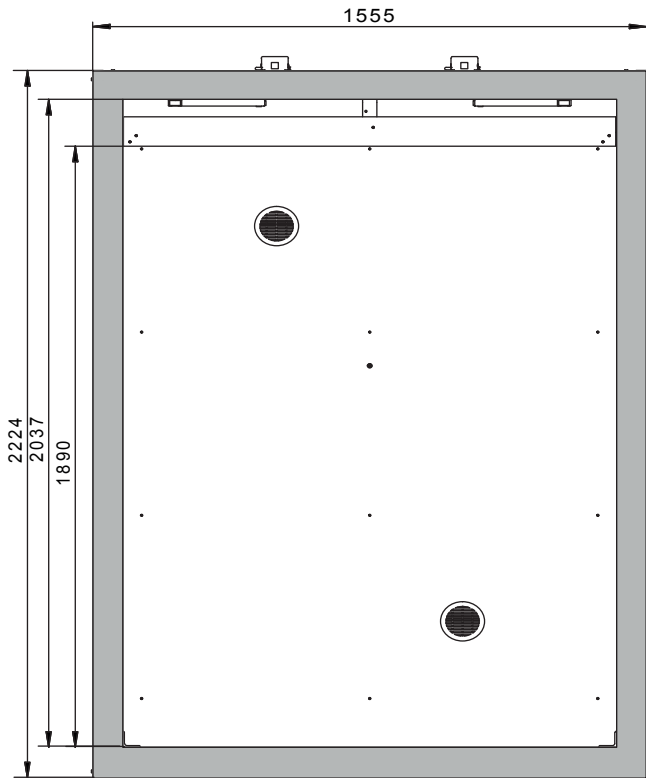

Side view

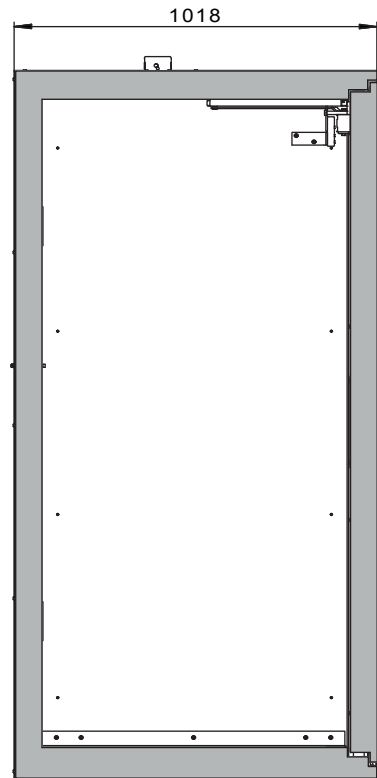

Top view

