

## Model UB30.060.140.2S




















Safe and approved storage of flammable hazardous substances in working areas

## **Function / construction:**

- Robust construction and longevity: body made of powdercoated sheet steel
- **User-friendly:** drawers remain open in any position, interior of drawers completely visible access to all containers
- **Safe:** drawers fitted with earthing wire incl. clamp as standard, seal welded sump, drawers are self-closing in the event of fire
- **No unauthorised use:** drawers lockable with cylinder lock and locking state indicator (red/green)
- Mobile: castors with plinth (optionally available), easy moving of the cabinet
- **Ventilation:** integrated air ducts ready for connection (DN 50) to a technical exhaust system



Dimensions	
Width (external)	1402.00 mm
Depth (external)	574.00 mm
Height (external)	600.00 mm
Width (internal)	1279.00 mm
Depth (internal)	452.00 mm
Height (internal)	502.00 mm
The available internal dimensions can vary depending on the	ie interior equipment package.

Weight / Load			
Weight without interior equipment	230 kg		
Distributed load	240.00 kg/m²		
Maximum load	300 kg		
Ventilation			
Extraction air	50 DN		

3 m3/h


minimum exhaust air quantity 10 times

Pressure drop inside the cabinet

Colouring / Surface finish		
Body colour code	RAL 7035	
Body colour	Light grey	
Body surface finish	plain	
Door / Drawer colour code	RAL 7035	
Door / Drawer colour	Light grey	
Door / Drawer surface finish	plain	

General Information	
Number of drawers	2
Capacity drawer	20.00 litres
Volume of drawer 2	11.50 litres
Customs tariff number	94032080

Front view Side view

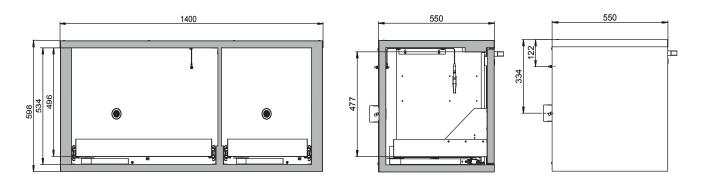

Top view

