

## Model UB30.060.110.2S






















Safe and approved storage of flammable hazardous substances in working areas

## **Function / construction:**

- Robust construction and longevity: body made of powdercoated sheet steel
- **User-friendly:** drawers remain open in any position, interior of drawers completely visible access to all containers
- **Safe:** drawers fitted with earthing wire incl. clamp as standard, seal welded sump, drawers are self-closing in the event of fire
- **No unauthorised use:** drawers lockable with cylinder lock and locking state indicator (red/green)
- Mobile: castors with plinth (optionally available), easy moving of the cabinet
- **Ventilation:** integrated air ducts ready for connection (DN 50) to a technical exhaust system



Dimensions	
Width (external)	1102.00 mm
Depth (external)	574.00 mm
Height (external)	600.00 mm
Width (internal)	979.00 mm
Depth (internal)	452.00 mm
Height (internal)	502.00 mm
The available internal dimensions can vary depending on the interior equipment package.	


Weight / Load	
Weight without interior equipment	180 kg
Distributed load	277.00 kg/m <sup>2</sup>
Maximum load	300 kg


Ventilation		
Extraction air	50 DN	
minimum exhaust air quantity 10 times	2 m³/h	
Pressure drop inside the cabinet	1 Pa	

Colouring / Surface finish	
Body colour code	RAL 7035
Body colour	Light grey
Body surface finish	plain
Door / Drawer colour code	RAL 7035
Door / Drawer colour	Light grey
Door / Drawer surface finish	plain

General Information	
Number of drawers	2
Capacity drawer	11.50 litres
Volume of drawer 2	11.50 litres
Customs tariff number	94032080

Front view Side view



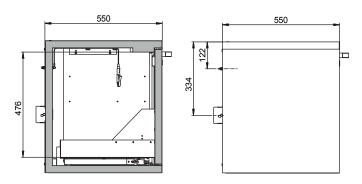

Top view

