



**Gas cylinder cabinet G-OD**  
**Model GOD.215.070.WDFWR, light grey (RAL 7035)**

**Safe and approved outdoor storage of flammable or toxic gases – for up to 2 x 50-litre gas cylinders**

**Function / construction:**

- **Robust construction and longevity:** completely galvanised and powder-coated structured surface and stainless steel base
- **No unauthorised use:** lockable turning lever (door also available with profile cylinder, compatible for locking system)
- **Easy alignment:** adjusting aids to compensate for uneven floor
- **Easy mounting of connecting pipes and gas fittings:** lead-through points in the ceiling of the cabinet
- **Ventilation:** effective ventilation through openings beneath the doors and at the rear wall

**Dimensions**

<b>Width (external)</b>	706.00 mm
<b>Depth (external)</b>	400.00 mm
<b>Height (external)</b>	2149.00 mm
<b>Width (internal)</b>	695.00 mm
<b>Depth (internal)</b>	370.00 mm
<b>Height (internal)</b>	2070.00 mm

The available internal dimensions can vary depending on the interior equipment package.

**Weight / Load**

<b>Weight without interior equipment</b>	85 kg
<b>Distributed load</b>	699.00 kg/m <sup>2</sup>
<b>Maximum load</b>	600 kg

**Ventilation**

<b>Extraction air</b>	75 DN
<b>Minimum exhaust air quantity 10 times</b>	5 m <sup>3</sup> /h
<b>Lead-through possibilities</b>	8

**Colouring / Surface finish**

<b>Body colour code</b>	RAL 7035
<b>Body colour</b>	Light grey
<b>Body surface finish</b>	textured
<b>Door / Drawer colour code</b>	RAL 7035
<b>Door / Drawer colour</b>	Light grey
<b>Door / Drawer surface finish</b>	textured

**General Information**

<b>Number of doors</b>	1
<b>Door opening angle</b>	180.00°
<b>Depth with open doors</b>	1034 mm
<b>x 50-litre gas cylinders</b>	2 piece
<b>Customs tariff number</b>	94032080

Front view

Side view

Top view

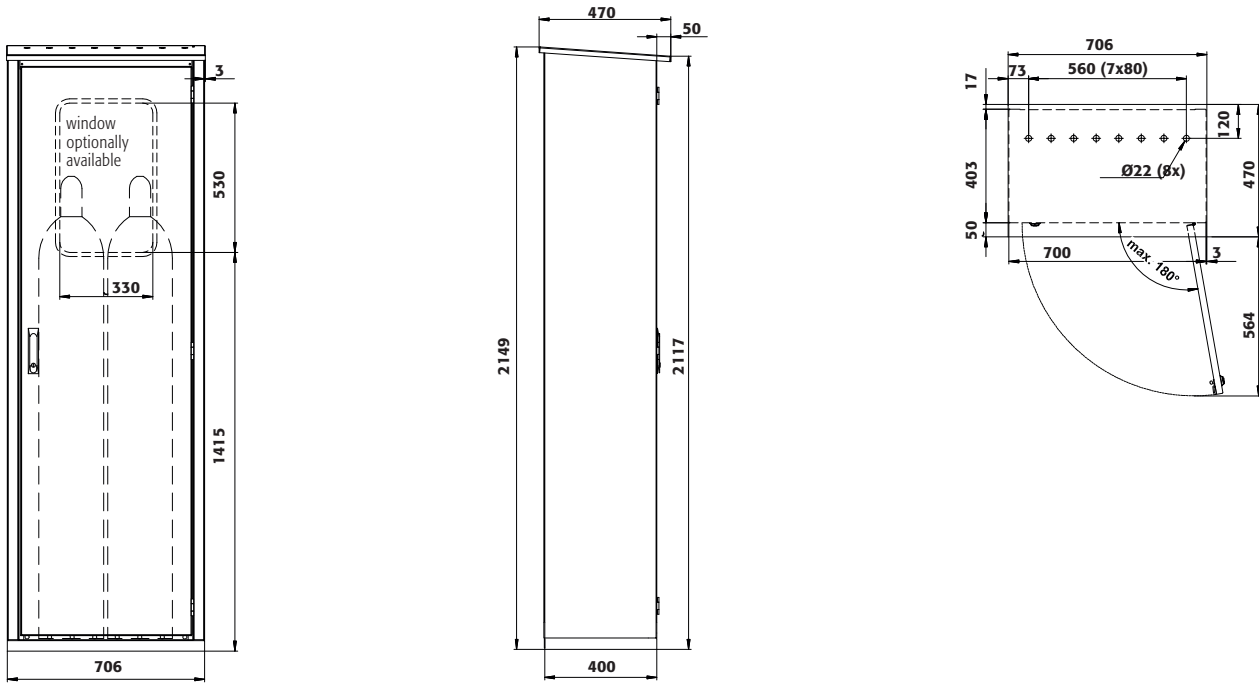


Diagram shows left-hinged door. Dimensions are identical for a right-hinged fitting.