



**Cabinet for chemicals CS-CLASSIC-F**  
**Model CS.195.105.F, body colour anthracite grey**  
**(RAL 7016), with wing doors in warning yellow**  
**(RAL 1004)**

**Safe and proper storage of non-flammable chemicals and toxic substances in working areas, type 30 safety box for the storage of flammable liquids, aerosol cans, etc.**

**Function / construction:**

- **Robust construction and longevity:** robust, high-quality, scratch-resistant outer body with powder-coated textured surface
- **no unauthorised use:** doors lockable with cylinder locking (integrated in the turning handle)
- **easy alignment:** adjusting aids to compensate for uneven floor
- **ventilation:** natural ventilation due to ventilation openings at the cabinet bottom, ready for connection to a technical exhaust system
- **Type 30 safety box:** for proper storage of flammable hazardous materials in work rooms, according to EN 14470-1 (type 30) and TRGS 510, 2 self-closing hinged doors, bottom collecting sump, powder-coated steel with 8.5 liters volume for the shreds and exhaust air connection (DN 75) for technical ventilation of the safety box

**Dimensions**

<b>Width (external)</b>	1055.00 mm
<b>Depth (external)</b>	520.00 mm
<b>Height (external)</b>	1950.00 mm
<b>Width (internal)</b>	995.00 mm
<b>Depth (internal)</b>	495.00 mm
<b>Height (internal)</b>	1835.00 mm

The available internal dimensions can vary depending on the interior equipment package.

**Weight / Load**

<b>Weight without interior equipment</b>	138 kg
<b>Distributed load</b>	460.00 kg/m <sup>2</sup>
<b>Maximum load</b>	600 kg

**Ventilation**

<b>Extraction air</b>	75 DN
<b>minimum exhaust air quantity 10 times</b>	9 m <sup>3</sup> /h
<b>Pressure drop inside the cabinet</b>	2 Pa


**Colouring / Surface finish**

<b>Body colour code</b>	RAL 7016
<b>Body colour</b>	anthracite grey
<b>Body surface finish</b>	textured
<b>Door / Drawer colour code</b>	RAL 1004
<b>Door / Drawer colour</b>	Warning yellow
<b>Door / Drawer surface finish</b>	textured

**General Information**


<b>Number of doors</b>	2
<b>Depth with open doors</b>	1026 mm
<b>Customs tariff number</b>	94032080

Front view

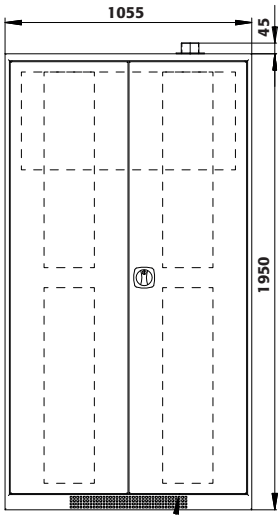


Natural ventilation

Side view

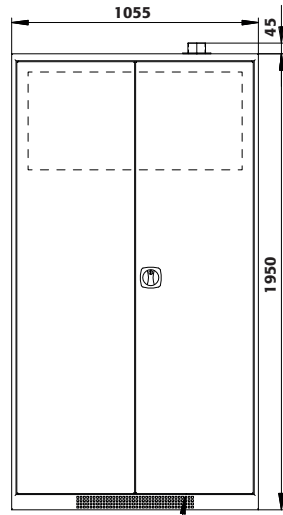

Natural ventilation

Top view

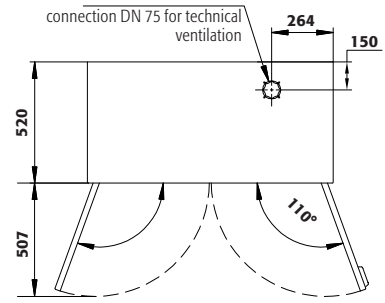

connection DN 75 for technical ventilation

264 150

520 507

110°