asecos

ID-Nr. 33200-892 Model SL.080.110.UB.2T



Cabinet for acids and alkalis SL-CLASSIC-UB Model SL.080.110.UB.2T, light grey

Safe and approved storage of aggressive, non flammable hazardous materials in working areas


Function / construction:


- Robust construction and longevity: made out of highly
 resistant melamin resin special plates
- **User-friendly:** access to all containers, 93° opening of the wing door, interior of the cabinet completely visible
- No unauthorised use: doors lockable with cylinder lock and locking state indicator (red/green)
- Mobile: castors with plinth (optionally available), easy moving of the cabinet
- **Ventilation:** integrated air ducts ready for connection (DN 50) to a technical exhaust system




Dimensions


Dimensions	
Width (external)	1100.00 mm
Depth (external)	570.00 mm
Height (external)	800.00 mm
Width (internal)	489.00 mm
Depth (internal)	530.00 mm
Height (internal)	760.00 mm
The available internal dimensions can vary depending on the interior	equipment package.
Weight / Load	
Weight without interior equipment	73 kg
Distributed load	98.00 kg/m²
Maximum load	100 kg
Ventilation	
Extraction air	50 DN
recom. exhaust air quantity 30 times	9 m³/h
Differential pressure (30 times air change)	10 Pa
minimum exhaust air quantity 10 times	3 m³/h
Pressure drop inside the cabinet	10 Pa
Colouring / Surface finish	
Body colour	Light grey
Body surface finish	textured
Door / Drawer colour	Light grey
Door / Drawer surface finish	textured
General Information	
Number of doors	2



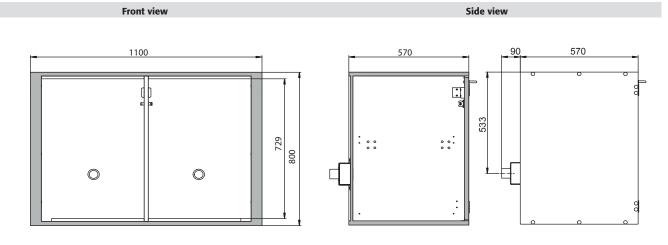







For further information please visit www.asecos.com