

#### Dimensions

Width (external)	1102.00 mm
Depth (external)	574.00 mm
Height (external)	600.00 mm
Width (internal)	979.00 mm
Depth (internal)	452.00 mm
Height (internal)	502.00 mm

The available internal dimensions can vary depending on the interior equipment package.

#### Weight / Load

Weight without interior equipment	120 kg
Distributed load	277.00 kg/m²
Maximum load	300 kg

#### Ventilation

Extraction air	50 DN
Minimum exhaust air quantity 10 times	2 m³/h
Differential pressure (10 times air change)	1 Pa

#### Colouring / Surface finish

Body colour code	
Body colour	Laboratory white (sim. RAL 9016)
Body surface finish	plain
Door / Drawer colour code	
Door / Drawer colour	Laboratory white (sim. RAL 9016)
Door / Drawer surface finish	plain

#### General Information

Number of drawers	1
Capacity drawer	21.5 litres
Customs tariff number	94032080

#### Safety storage under bench cabinet UB-S-90


Model UB90.060.110.UL.2S, laboratory white (sim. RAL 9016)

**Safe and approved storage of flammable hazardous substances in working areas**


#### Function / construction:

- **Robust construction and longevity:** body made of powder-coated sheet steel
- **User-friendly:** drawers remain open in any position, interior of drawers completely visible – access to all containers
- **Safe:** drawers fitted with earthing wire incl. clamp as standard, seal welded sump, drawers are self-closing in the event of fire
- **No unauthorised use:** drawers lockable with cylinder lock and locking state indicator (red/green)
- **Mobile:** castors with plinth (optionally available), easy moving of the cabinet
- **Ventilation:** integrated air ducts ready for connection (DN 50) to a technical exhaust system

Front view

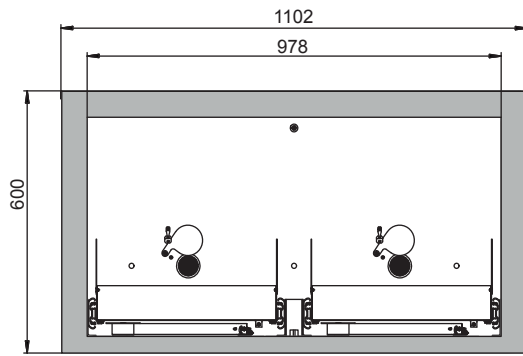

Side view

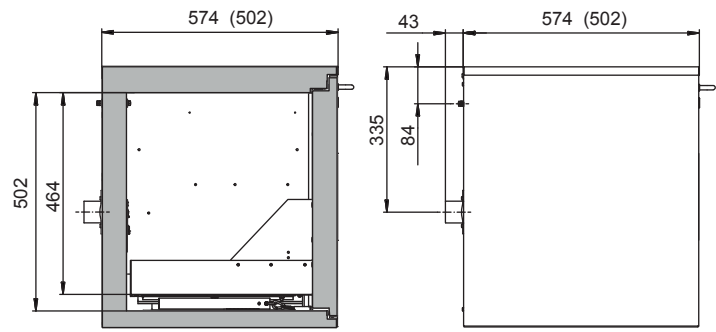

Top view

