

#### Dimensions

Width (external)	1402.00 mm
Depth (external)	502.00 mm
Height (external)	600.00 mm
Width (internal)	1279.00 mm
Depth (internal)	382.00 mm
Height (internal)	502.00 mm

The available internal dimensions can vary depending on the interior equipment package.

#### Weight / Load

Weight without interior equipment	205 kg
Distributed load	240.00 kg/m²
Maximum load	300 kg

#### Ventilation

Extraction air	50 DN
Minimum exhaust air quantity 10 times	3 m³/h
Differential pressure (10 times air change)	1 Pa

#### Colouring / Surface finish

Body colour code	
Body colour	Laboratory white (sim. RAL 9016)
Body surface finish	plain
Door / Drawer colour code	RAL 7035
Door / Drawer colour	Laboratory white (sim. RAL 9016)
Door / Drawer surface finish	plain

#### General Information

Number of drawers	1
Capacity drawer	10.00 litres
Number of doors	2
Door opening angle	93.00°
Depth with open doors	918 mm
Customs tariff number	94032080

#### Safety storage under bench cabinet UB-ST-90

Model UB90.060.140.050.UL.S2T, laboratory white (sim. RAL 9016)


**Safe and approved storage of flammable hazardous substances in working areas**

#### Function / construction:


- **Robust construction and longevity:** body made of powder-coated sheet steel
- **User-friendly and safe:** door and drawer remain open in any position, interior of the cabinet completely visible — access to all containers, 93° opening of the wing door
- **Safe:** drawer fitted with earthing wire incl. clamp as standard, seal welded sump, drawers are self-closing in the event of fire
- **No unauthorised use:** door and drawer lockable with cylinder lock and locking state indicator (red/green)
- **Mobile:** castors with plinth (optionally available), easy moving of the cabinet
- **Ventilation:** integrated air ducts ready for connection (DN 50) to a technical exhaust system

Front view Side view

Front view Side view

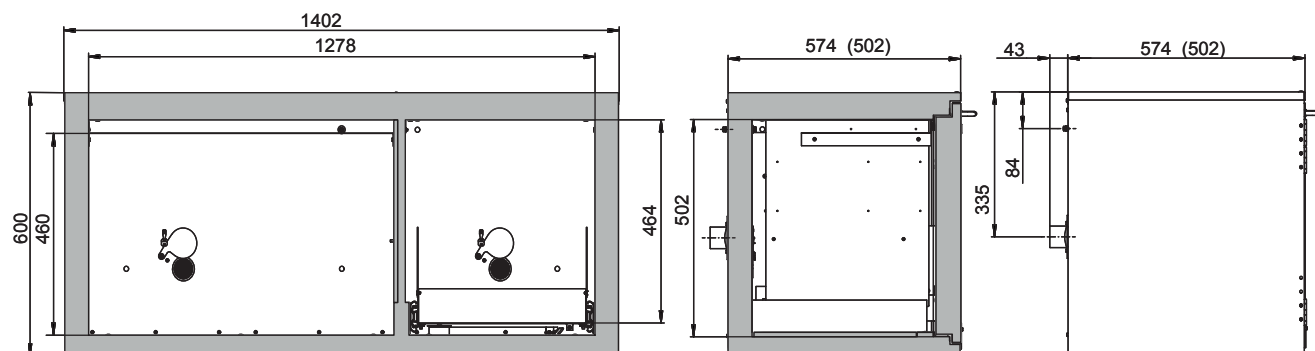

Top view

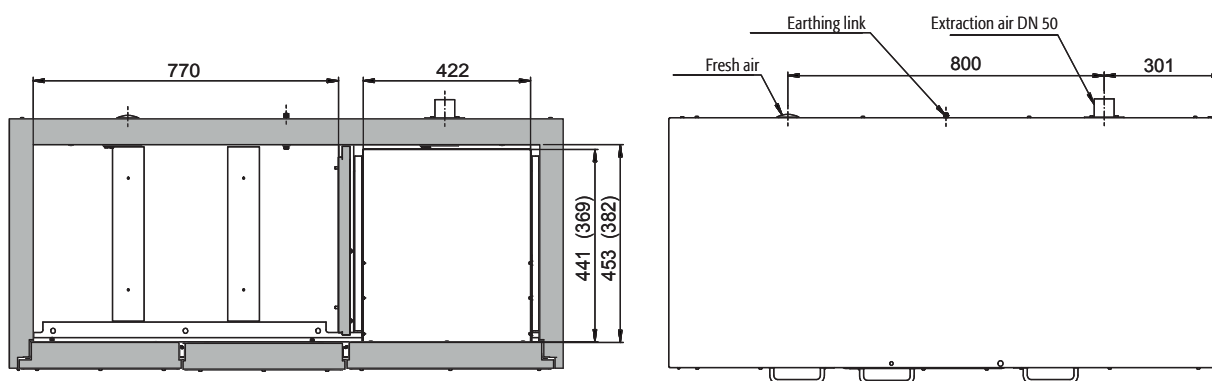

For further information please visit [www.asecos.com](http://www.asecos.com)